Leading
IOL solutions

Basis Q

trifocal

Single piece, sterile, foldable acrylic aspheric hydrophilic posterior chamber intraocular lens (IOL) with UV blocker and blue light filter. The optic is trifocal, with 3 mm diameter diffractive array on the anterior surface utilizing EPS technology. The IOL is non-preloaded, which has to be manually loaded into a compatible injector before implantation.

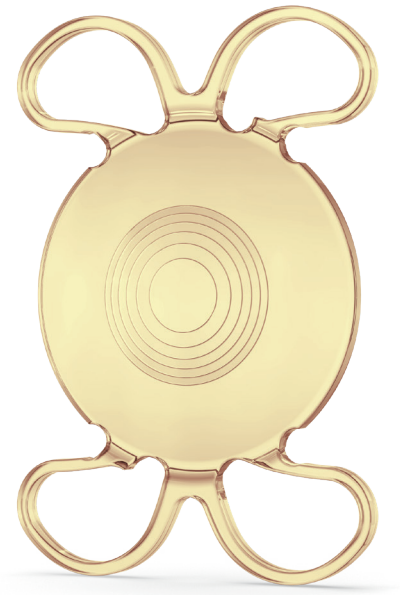

MATERIAL

Copolymer of hydrophobic and hydrophilic monomers with 25% water content, UV blocker and blue light filter	
Refractive Index	1.46
Abbe Number	58

DESIGN

Optic Diameter Overall Diameter	6 mm	11.0 mm (8.0 D → +15.0 D) 10.7 mm (+15.5 D →+35.0 D)
Optic Design	Aspheric - Aberration Neutral Biconvex (+8.0 D → +35.0 D)	
Nominal A-constant	118,9	
Haptic Design	Posterior vaulting 4 closed loops with 0° angulation	
PCO Prevention	360° sharp edge	
Shelf Life	5 years after sterilization	

INJECTION

Estimated Incision Size	1.8 - 2.2 mm
Recommended Injector	Compatibility chart available: 1stq.eu/compatibility/

CONSTANTS
for optical and immersion ultrasound measurements

SRK/T A-Constant	Haigis	Hoffer Q
A = 118.9	a0 = 1.243 a1 = 0.400 a2 = 0.100	pACD = 5.46

Holladay I	Barrett Universal II	Holladay II
SF = 1.67	LF = 1.83	ACD = 5.49

The safety and performance of 1stQ IOLs have been tested in clinical investigations and the clinical data demonstrate that these IOLs meet the requirements of the state of the art.

MA-IOL-QFLEX-MD124-DTS-EN 202608
Rev: 1064-V02-03/2026

Basis Q

trifocal

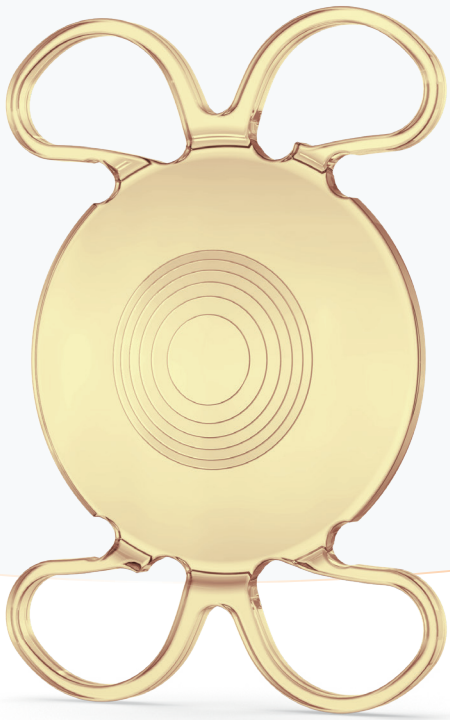

POWER RANGE

Article No. Yellow	SEQ/Powers	Steps	Cylinders	Steps	Addition
S2EWYN	+8.0 D to +9.0 D	1.0 D			+3.5 D near +1.75 D intermediate
B2EWYN	+10.0 D to +30.0 D	0.5 D			+3.5 D near +1.75 D intermediate
S2EWYN	+31.0 D to +35.0 D	1.0 D			+3.5 D near +1.75 D intermediate

1stQ GmbH
Konrad-Zuse-Ring 23 | 68163 Mannheim
Germany

Leading
IOL solutions

www.1stq.eu
www.1stq.de/en