1st Q Leading IOL solutions

Basis Z

hydrophobic preloaded

Single piece, sterile, foldable aspheric hydrophobic acrylic intraocular lens (IOL) with UV blocker, with optional blue light filter. The optic is monofocal. The IOL is available as part of a preloaded injector system.

MATERIAL

Hydrophobic acrylic with UV blocker and optional blue light filter

Refractive Index	1.47
Abbe Number	58

DESIGN

Optic Diameter Overall Diameter	6 mm	13 mm
Optic Design	Aspheric - Aberration Neutral Biconcave (-10.0 D → -1.0 D) Biconvex (0.0 D → +35.0 D)	
Nominal A-constant	118.9	
Haptic Design	Posterior vaulting Z-haptic with 0° angulation	
PCO Prevention	360° sharp edge	
Shelf Life	2.5 years after sterilization	

INJECTION

Estimated Incision Size	2.2 mm
Compatible Injector	POB-MA SINGLE-USE PRELOADED INJECTOR

CONSTANTS
for optical and immersion ultrasound measurements

SRK/T A-Constant	Haigis	Hoffer Q
A = 119.033*	a0 = 0.8751 a1 = 0.2659 a2 = 0.1416	pACD = 5.60

Holladay I	Barrett Universal II	Holladay II
SF = 1.809	LF = 1.90	ACD = 5.57

*Based on IOL Con 03.2023

The safety and performance of 1stQ IOLs have been tested in clinical investigations and the clinical data demonstrate that these IOLs meet the requirements of the state of the art.

MA-IOL-POBMA-MD108-DTS-EN 202608
Rev: 1060-V02-03/2026

Basis Z

hydrophobic preloaded

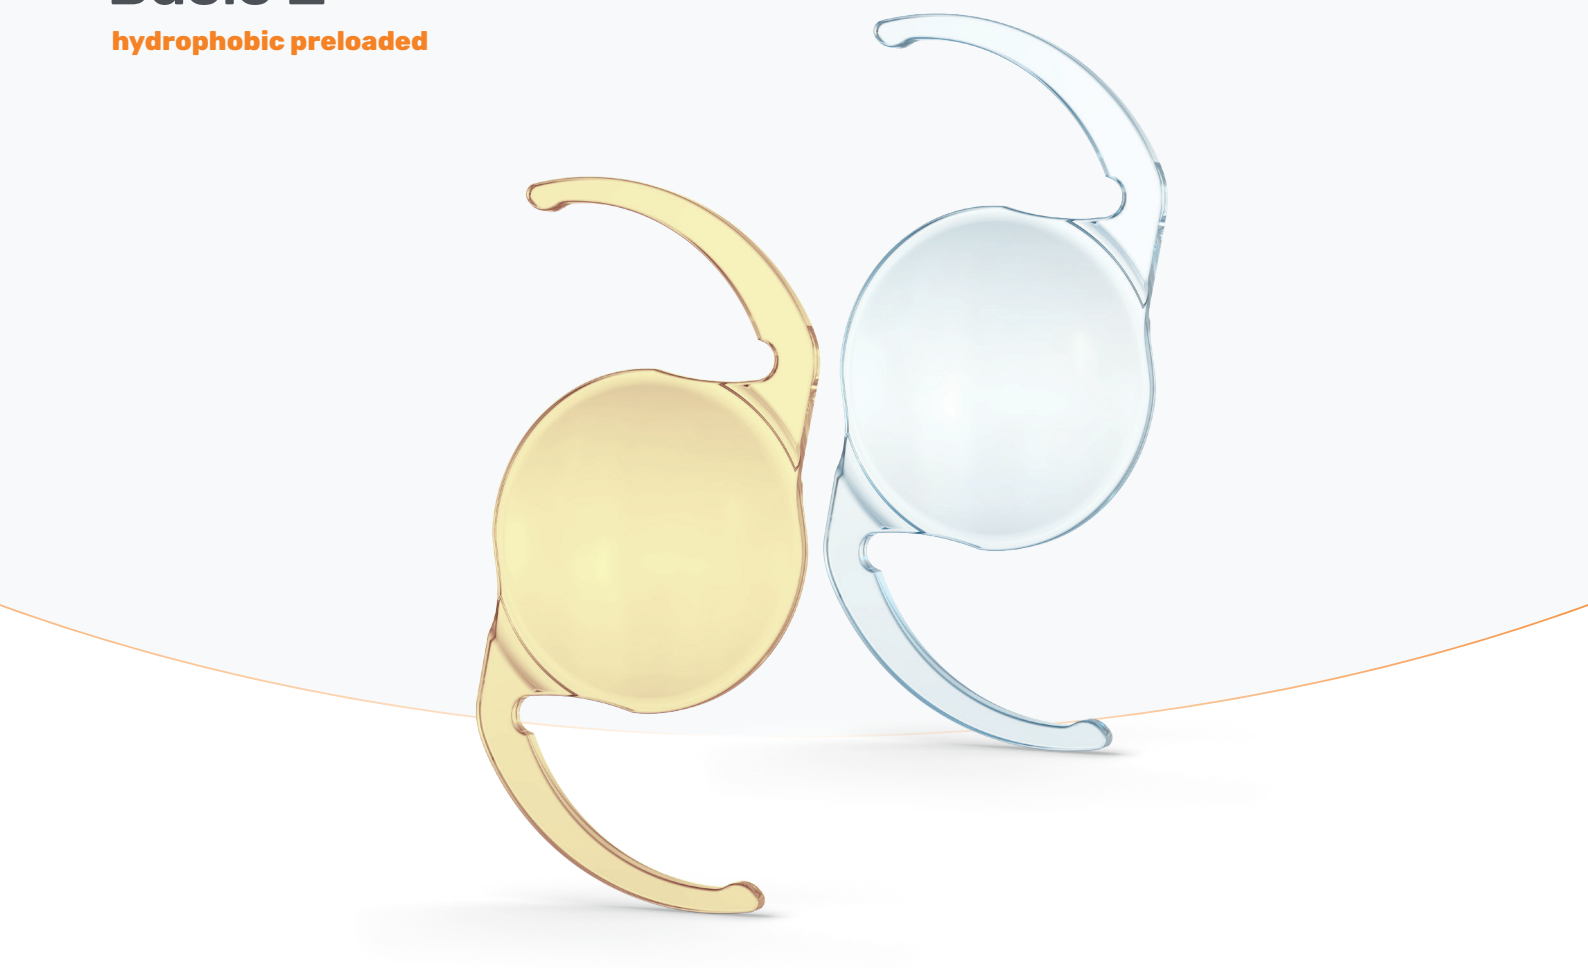

POWER RANGE

Article No. Clear	Article No. Yellow	SEQ/Powers	Steps	Cylinders	Steps	Addition
S1AB00	S1ABY0	-10.0 D to -1.0 D	1.0 D	-	-	-
B1AB00	B1ABY0	0.0 D to +9.0 D	1.0 D	-	-	-
B1AB00	B1ABY0	+10.0 D to +30.0 D	0.5 D	-	-	-
S1AB00	S1ABY0	+31.0 D to +35.0 D	1.0 D	-	-	-

1stQ GmbH
Konrad-Zuse-Ring 23 | 68163 Mannheim
Germany

Leading
IOL solutions

www.1stq.eu
www.1stq.de/en